



660

DURABLE, OIL-RESISTANT, TRIPLE-DIPPED PVC GLOVE

Strong, yet extremely soft and flexible. The 660 features a soft comfortable cotton lining and the rough textured coating ensures grip and increases the glove's abrasion resistance and durability. The gloves are also oil and chemical resistant. Available in 3 different lengths.

FEATURES

- › A flexible, soft glove that absorbs perspiration, for ultra comfortable extended wear and with good mechanical resistance
- › Seals and protects the hand against chemicals while remaining flexible
- › Impermeable for working in damp or greasy environments, enabling you to grip objects securely
- › Excellent abrasion resistance (EN388 Level 4)
- › Surface provides tactile feel and better grip
- › Greater hygiene
- › Designed for easy movement and continuous wear
- › No irritation by seams in contact with the skin
- › Forearm well protected
- › Available in bulk packs to reduce plastic packaging



SUITABLE FOR

Typical Industries

- Agriculture
- Chemical
- Forestry & Fishing
- Manufacturing
- Municipal Services
- Oil & Gas

Suitable Applications

- Assembly
- Chemical Processing
- Cleaning
- Handling Oily Objects
- Heavy Duty Handling
- Maintenance of Plant
- Refining

CERTIFICATION



See overleaf for explanation



660

PRODUCT INFORMATION

MATERIALS	LINER:	Cotton
	COATING:	PVC
COLOUR	Dark blue	
LENGTH (mm)	300-360 (model dependant)	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING	VEND COMPATIBLE OPTION	
			CODE	PACKAGING
8/M 9/L 10/XL 11/XXL	Standard version	10 individually bagged pairs per bag	BULK PACK	10 pairs per bag 60 pairs per case
	SHO6602		OPTION	
	SHO6603	SHO660B2		
	SHO6604	SHO660B3		
	SHO6605	SHO660B4		
	34 / 36cm version	60 pairs per case	SHO660B5	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

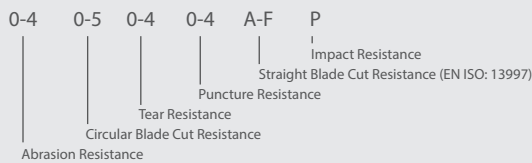

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-660_0620_1