



NITRILE FOAM PALM WITH 3D MOISTUREVAP BREATHABILITY

Excellent resistance to abrasion. Outstanding durability and grip.

FEATURES

- › Level 4 abrasion resistance
- › Superior comfort and dexterity
- › Anatomically engineered for maximum fit
- › Excellent grip in both wet and dry environments
- › An Oeko-Tex™ certified product
- › Seamless nylon/spandex liner
- › Patented nitrile foam palm coating enhances protection
- › Sanitized® antimicrobial finish provides extra freshness
- › Light thermal protection up to 100°C for a short period
- › Touchscreen capabilities to allow usage with screen devices



SUITABLE FOR

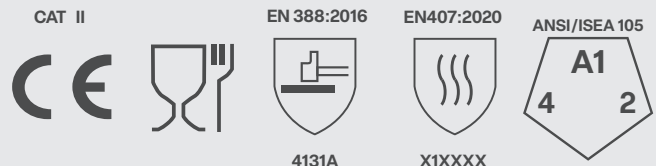
Typical Industries

- Automotive
- Logistics
- Maintenance
- Manufacturing
- Oil and Gas
- Utilities

Suitable Applications

- Assembly
- Goods Handling
- Light Fabrication
- Quality Inspection
- Warehousing

CERTIFICATION



See overleaf for explanation

**PRODUCTION INFORMATION**

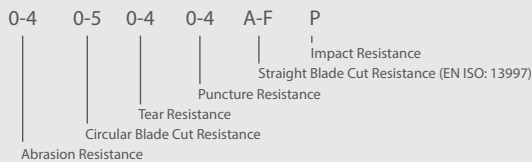
MATERIALS	LINER:	15 gauge nylon, spandex
	COATING:	Foam nitrile
COLOUR	Grey / Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

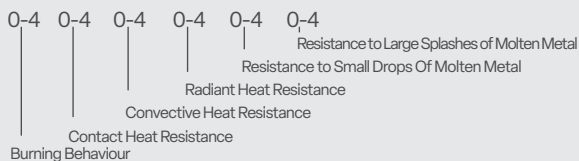
SIZE	CODE	PACKAGING
7/S	SKY491	10 pairs per bag
8/M	SKY492	
9/L	SKY493	
10/XL	SKY494	120 pairs per case
11/XXL	SKY495	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement.
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight.
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS***

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**HEAT AND FIRE EN 407****PERFORMANCE LEVELS**

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com