

IMPACT PROTECTION

CUT PROTECTION

Benchmark

BMG234



HIGH CUT RESISTANT IMPACT GLOVE

A flexible seamless cut resistant level D glove with foam nitrile on the palm to maximize grip and TPR on the back to protect against shocks.

FEATURES

- › Cut resistance: level D (EN 388:2016)
- › 13 gauge (HPPE, steel) liner offers great dexterity for fine handling
- › Excellent grip with a nitrile foam sandy coating on the palm
- › Red nitrile foam for increased visibility
- › Dense, moulded TPR protection zones on knuckles, fingers, thumb and back of hand
- › Light contact heat protection up to 100°C/212°F
- › TPR zones are sewn to the liner for increased resistance
- › Elasticated wrist provides a secure fit.



SUITABLE FOR


Typical Industries

- Oil and Gas
- Construction
- Mining
- Transport
- Heavy Engineering
- Offshore
- Ports

Suitable Applications

- Demolition
- Drilling
- Extraction
- Heavy handling
- Cargo handling
- Extraction and refining
- Rigging

CERTIFICATION

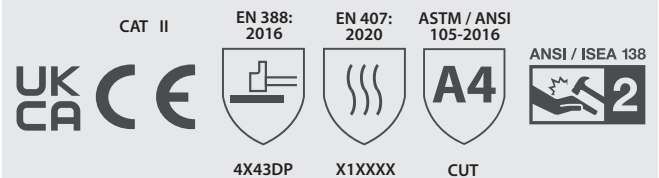

See overleaf for explanation



IMPACT PROTECTION

CUT PROTECTION

Benchmark**BMG234****PRODUCT INFORMATION**


MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Nitrile foam coating
COLOUR	Grey/Red	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut and impact protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING
8/M	BMG00234FF	10 pairs per bag
9/L	BMG00234FH	60 pairs per case
10/XL	BMG00234FJ	
11/XXL	BMG00234FL	
12/XXXL	BMG00234FN	

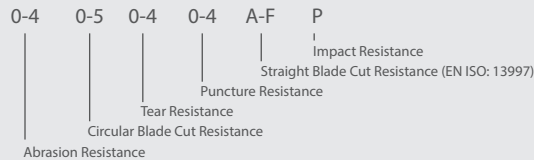CERTIFICATION LEGENDSMECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

CLASSIFICATION FOR IMPACT RESISTANCE

Performance level	Mean (kN)	All impacts (kN)
1	≤ 9	< 11.3
2	≤ 6.5	≤ 8.1
3	≤ 4	≤ 5

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | BMK-DATA-BMG234_0523_1

EU compliance certificate delivered by the notified body INTERTEK ITALIA SPA, Via Guido Miglioli, 2/A - 20063 Cernusco sul Naviglio (MI) - Italia (Notified Body No. 2575)
 UKCA compliance certificate delivered by the notified body ITS Testing Services UK Ltd, Centre Court, Meridian Business Park, Leicester, LE19 1WD, United Kingdom (Approved Body No. 0362)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.