

Benchmark**BMG735**

CUT C HIGH STRENGTH NYLON / NITRILE SANDY FINISH GLOVE

A lightweight glass and steel fibre free medium cut resistance glove with excellent grip properties in all conditions.

FEATURES

- › A flexible and comfortable glove offering great dexterity
- › Glass and steel fibre free reduce risks of irritation
- › Nitrile sandy finish on palm provides a secure grip in light oily, greasy and dry conditions
- › Flexible, close-fitting design for a comfortable wearing experience
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit



SUITABLE FOR


Typical Industries

- Aerospace
- Engineering
- Automotive
- Logistics
- Construction
- Manufacturing

Suitable Applications

- Assembly
- Handling sharp and oily parts
- Maintenance
- Injection molding
- Machining
- Bodyworks

CERTIFICATION

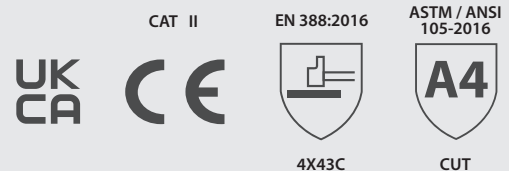

See overleaf for explanation

Benchmark**BMG735****PRODUCT INFORMATION**

MATERIALS	LINER:	13 gauge high strength nylon
	COATING:	Nitrile sandy finish
COLOUR	Grey/Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	BMG00735FB	10 pairs per bag
7/S	BMG00735FD	120 pairs per case
8/M	BMG00735FF	
9/L	BMG00735FH	
10/XL	BMG00735FJ	
11/XXL	BMG00735FL	

CERTIFICATION LEGENDS

MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

0-4	0-5	0-4	0-4	A-F	P
Abrasion Resistance		Circular Blade Cut Resistance	Tear Resistance	Puncture Resistance	Impact Resistance
				Straight Blade Cut Resistance (EN ISO: 13997)	

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | BMK-DATA-BMG735_0722_1

EU compliance certificate delivered by the notified body INTERTEK ITALIA SPA, Via Guido Miglioli, 2/A - 20063 Cernusco sul Naviglio (MI) - Italia (Notified Body No. 2575)
 UKCA compliance certificate delivered by the notified body ITS Testing Services UK Ltd, Centre Court, Meridian Business Park, Leicester, LE19 1WD, United Kingdom (Approved Body No. 0362)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.